




## Ceiling fixings with wire ropes

### Short Description

- Ceiling anchors with drop wires
- 1.5mm wire ropes with up to 15kg suspended loads
- Roof hanging wires 1 or 2 metre lengths
- Huge stocks of all fittings

### Product Images



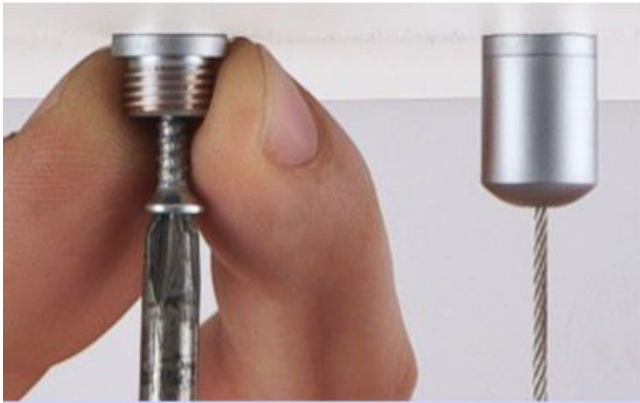

**SCREW CEILING  
ANCHOR**

**U.SCA.1/T**



**DOME SLOTTED  
ANCHOR**

**U.DOME.1/T**



**TWIST CEILING  
ANCHOR**

**U.TCA.1/T**



**LOOP END CABLE  
(Lasso)**

**CABLE.2/L**

## Screw Ceiling Anchor

## Dome Slotted Anchor

## Twist Ceiling Anchor

## Loop End Cable



## Description

### Wire rope cable anchor fixings - Ceiling or beam

**TOP Anchor FIXINGS** are supplied complete with galvanised wire ropes (1.5mm diam in either 1m or 2m lengths). These ceiling fixings are normally combined with a [bottom end fitting](#) to provide height adjustment.

#### **Screw Ceiling Anchor (U.SCA.1/T or U.SCA.2/T)**

Screw-on ceiling anchor supplied with 1m or 2m wire rope. Satin finish fitting, suitable for plasterboard and

wooden ceilings.

**Dome Slotted Anchor (U.DOME.2/T)**

Chrome finish dome screw-on anchor has a cable slot to allow attachment to sloping ceilings or vertical surfaces, including. 2m wire rope.

**Twist Ceiling Anchor (U.TCA.1/T or U.TCA.2/T)**


The ceiling grid anchor twists on to lock securely, providing reliable fixing for a suspended ceiling with a 1m/2m long wire. White/satin finish.

**Loop End Cable (CABLE.2/L or CABLE.3/L)**

Easily create a lasso to suspend from a roof girder, purlin or trunking using 2m/3m wire rope with a pre-formed crimped loop at one end.


<p>More Information</p>	<p>Screw Size: 4mm x 40mm (Imperial no. 8 x 1 1/2 inch)</p> <p><b>These hanging hardware components</b> provide a secure TOP FIXING to a ceiling or roof space, providing a plain end hanging wire. These top fixings do not provide any height adjustment facility. (Other <a href="#">ceiling anchor fittings</a> incorporating a clutch mechanism for height adjustment at the ceiling are available).</p> <p>To complete the set, a bottom fitting (such as a hook) is required. A choice of suitable <a href="#">bottom components</a> is available here: <a href="#">BOTTOM FITTINGS</a>.</p> <p><b>Loadings</b></p> <p>The safe working load depends on what the top fitting is anchored to - i.e. on the load-carrying ability of the top fixing. The wire rope will safely carry a load of 15kg. Still, it is likely that the ceiling fixing may only be suitable for a lesser loading - especially suspended ceilings and plasterboard unless specialist proprietary plasterboard screws and plugs are used in place of the 'basic' plugs supplied with these components.</p> <p><b>Dimensions</b></p> <p>The screw ceiling anchor is a petite matte silver fitting with a diameter of just 12mm.</p> <p>Dome slotted anchor has a 16mm diameter and a shiny chrome finish.</p> <p>Twist ceiling anchor fits onto ceilings with a standard 25mm wide ceiling grid.</p>
-------------------------	--

Screw Ceiling  
Anchor



Product Dimensions

Dome Ceiling  
Anchor

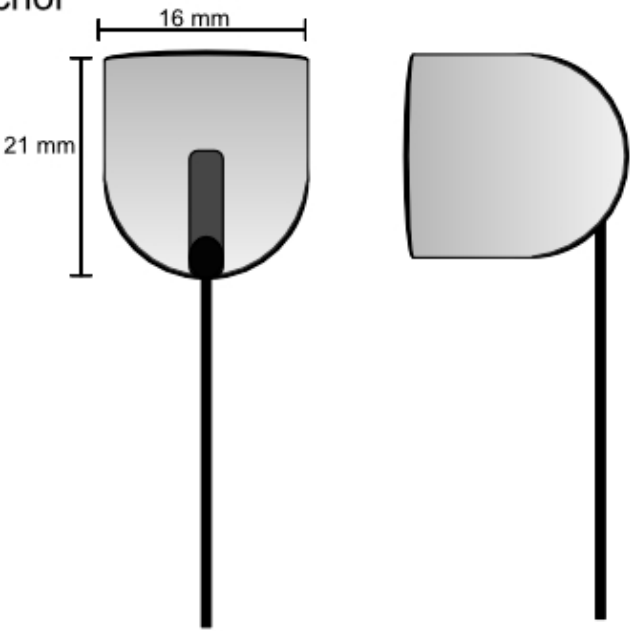

Delivery and Returns

- We offer a choice of delivery options tailored to the goods selected and your location, calculated for you automatically in the Checkout. When feasible, you will be offered options for Free, Economy or Next Day delivery.
- Any product returned by the purchaser must be unused and in its original packaging, which should be unmarked. If goods are received damaged or faulty we will take care of the problem.
- For detailed information about Delivery charges or Returns and refund policies, please click on the links below.

Include in Google Feed

Yes

Postable

No

Small parcel	No
Oversize	No

